



Project

Ref.no.


## FOCUS LED - Art. nr. 81012817




IP20 3 SDCM



### Light Distribution

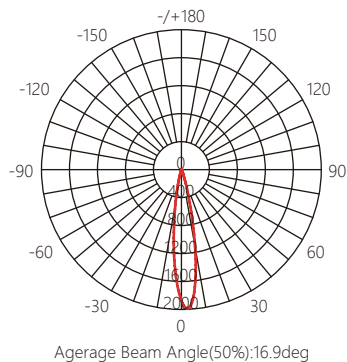

### Cone Diagram

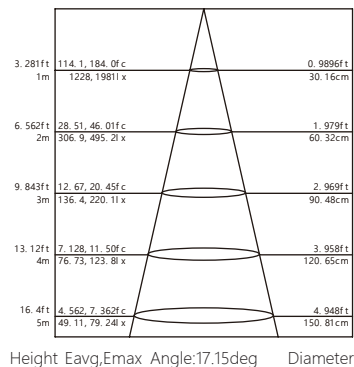

### DESCRIPTION

FOCUS LED downlight is with super slim trim and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc...

### GENERAL

Die-casting aluminium housing.  
Powdercoating finish.  
Led driver is connected externally.  
Easy for installation and maintenance.

### LED SOURCE

Number of light sources: 1  
Source type: SMD LED  
Watt: 3W  
Nominal luminous : 300lm  
CRI≥90  
CCT: 4000K  
L90 / 40000 h @ Ta25°C  
SDCM < 3  
Luminous output: 223lm  
Luminous efficacy: 70lm/W

### OPTICAL

Lens  
Beam angle: 15°

### CONTROL

AC 220V-240V 50Hz/60Hz  
ON/OFF / 1-10V / TRIAC / DALI