



Project

Ref.no.


FOCUS LED - Art. nr. 81012817




IP20 3 SDCM

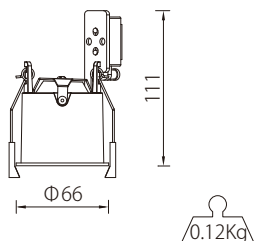

Light Distribution

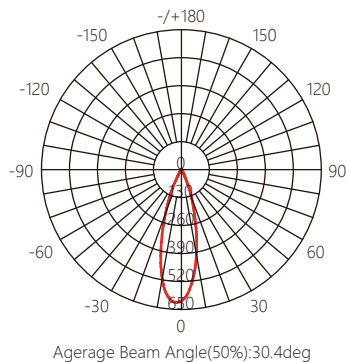

Cone Diagram

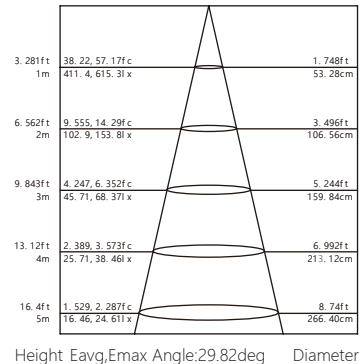

DESCRIPTION

FOCUS LED downlight is with super slim trim and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc...

GENERAL

Die-casting aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Easy for installation and maintenance.

LED SOURCE

Number of light sources: 1
Source type: SMD LED
Watt: 3W
Nominal luminous : 300lm
CRI≥90
CCT: 3000K
L90 / 40000 h @ Ta25°C
SDCM < 3
Luminous output: 187lm
Luminous efficacy: 60lm/W

OPTICAL

Lens
Beam angle: 30°

CONTROL

AC 220V-240V 50Hz/60Hz
ON/OFF / 1-10V / TRIAC / DALI